

# PUNAPÄÄ 2022



<b>Oil Pattern Distance:</b> 42 Feet	<b>Reverse Brush Drop:</b> 32 Feet	<b>Oil Per Board:</b> 40 uL
<b>Forward Oil Total:</b> 12.24 mL	<b>Reverse Oil Total:</b> 10.8 mL	<b>Volume Oil Total:</b> 23.04 mL
<b>Forward Boards Crossed:</b> 306 Boards	<b>Reverse Boards Crossed:</b> 270 Boards	<b>Total Boards Crossed:</b> 576 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	3R	2	14	72	0.0	1.9	1.9	2880
2	4L	6R	3	18	93	1.9	9.5	7.6	3720
3	6L	9R	2	22	52	9.5	15.7	6.2	2080
4	10L	10R	2	22	42	15.7	21.9	6.2	1680
5	12L	12R	2	22	34	21.9	28.1	6.2	1360
6	14L	14R	1	22	13	28.1	31.2	3.1	520
7	2L	2R	0	22	0	31.2	38.0	6.8	0
8	2L	2R	0	30	0	38.0	42.0	4.0	0

Navigation: Forward Reverse More


	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	42.0	31.0	-11.0	0
2	10L	10R	1	22	21	31.0	27.9	-3.1	840
3	9L	9R	2	22	46	27.9	21.7	-6.2	1840
4	8L	8R	2	22	50	21.7	15.5	-6.2	2000
5	6L	6R	3	18	87	15.5	7.9	-7.6	3480
6	4L	4R	2	14	66	7.9	4.0	-3.9	2640
7	2L	2R	0	14	0	4.0	0.0	-4.0	0

Navigation: Forward Reverse More

Conditioner:  
Type In or Select One

TransferType:  
Type In or Select One

- Forward
- Reverse
- Combined
- Buff

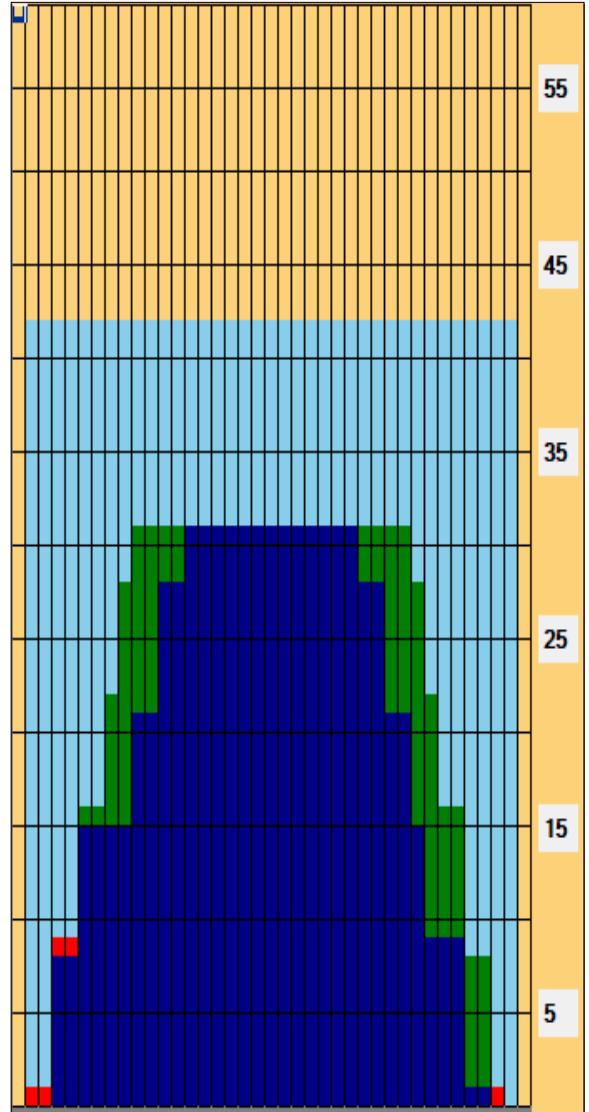

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	2.75	1.24	1.01	1.01	1.26	3.67

