

SENIORIT 3



Oil Pattern Distance:	42 Feet	Reverse Brush Drop:	36 Feet	Oil Per Board:	40 uL
Forward Oil Total:	8.12 mL	Reverse Oil Total:	10.36 mL	Volume Oil Total:	18.48 mL
Forward Boards Crossed:	203 Boards	Reverse Boards Crossed:	259 Boards	Total Boards Crossed:	462 Boards


	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	5L	5R	2	18	62	0.0	2.5	2.5	2480
2	8L	8R	1	18	25	2.5	5.0	2.5	1000
3	9L	9R	2	22	46	5.0	11.2	6.2	1840
4	10L	10R	2	26	42	11.2	18.5	7.3	1680
5	12L	12R	1	26	17	18.5	22.1	3.6	680
6	15L	15R	1	26	11	22.1	25.7	3.6	440
7	2L	2R	0	30	0	25.7	42.0	16.3	0

Conditioner:
Type In or Select One

TransferType:
Type In or Select One

Forward
Reverse
Combined
Buff

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	42.0	34.0	-8.0	0
2	12L	12R	2	22	34	34.0	27.8	-6.2	1360
3	10L	10R	4	18	84	27.8	17.6	-10.2	3360
4	7L	7R	4	18	108	17.6	7.4	-10.2	4320
5	4L	4R	1	14	33	7.4	5.5	-1.9	1320
6	2L	2R	0	14	0	5.5	0.0	-5.5	0

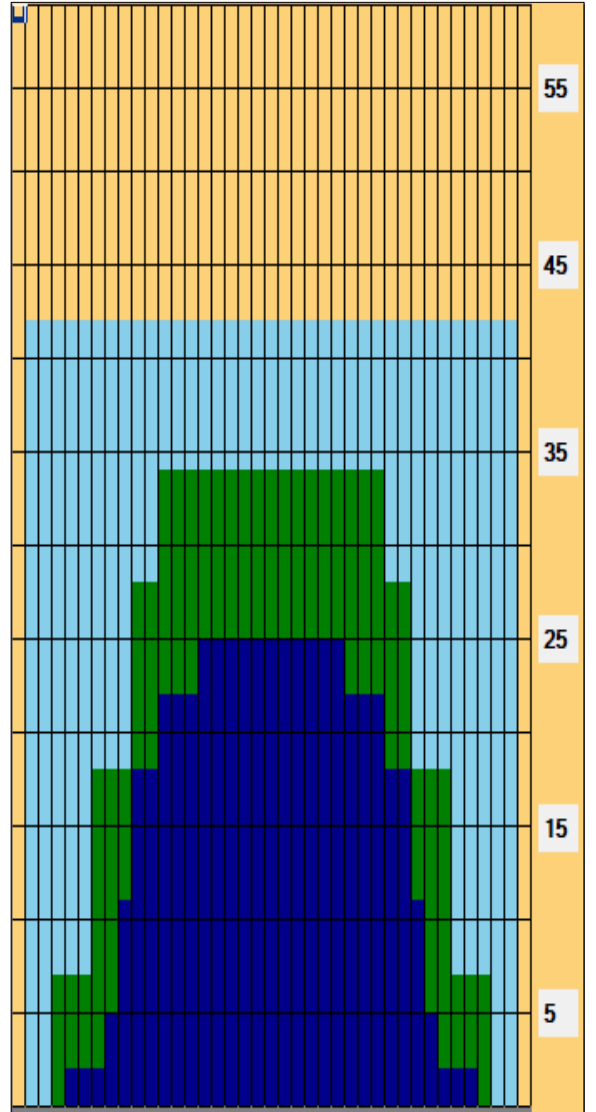

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	7.14	1.45	1.02	1.02	1.45	7.14

