

# PunaPää Pläjäys 2024



**Oil Pattern Distance:** 42 Feet      **Reverse Brush Drop:** 36 Feet      **Oil Per Board:** 40 uL  
**Forward Oil Total:** 10.48 mL      **Reverse Oil Total:** 10.36 mL      **Volume Oil Total:** 20.84 mL  
**Forward Boards Crossed:** 262 Boards      **Reverse Boards Crossed:** 259 Boards      **Total Boards Crossed:** 521 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	2	18	74	0.0	2.5	2.5	2960
2	6L	6R	2	18	58	2.5	7.6	5.1	2320
3	8L	8R	1	18	25	7.6	10.1	2.5	1000
4	9L	9R	2	22	46	10.1	16.3	6.2	1840
5	10L	10R	2	26	42	16.3	23.6	7.3	1680
6	12L	12R	1	26	17	23.6	27.2	3.6	680
7	2L	2R	0	30	0	27.2	42.0	14.8	0


Conditioner:  
 Type In or Select  
 One  
  
 TransferType:  
 Type In or Select  
 One

- Forward
- Reverse
- Combined
- Buff

◀ ▶ ▶▶ Forward Reverse More

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	42.0	34.0	-8.0	0
2	12L	12R	2	22	34	34.0	27.8	-6.2	1360
3	10L	10R	4	18	84	27.8	17.6	-10.2	3360
4	7L	7R	4	14	108	17.6	9.7	-7.9	4320
5	4L	4R	1	14	33	9.7	7.8	-1.9	1320
6	2L	2R	0	14	0	7.8	0.0	-7.8	0

◀ ▶ ▶▶ Forward Reverse More

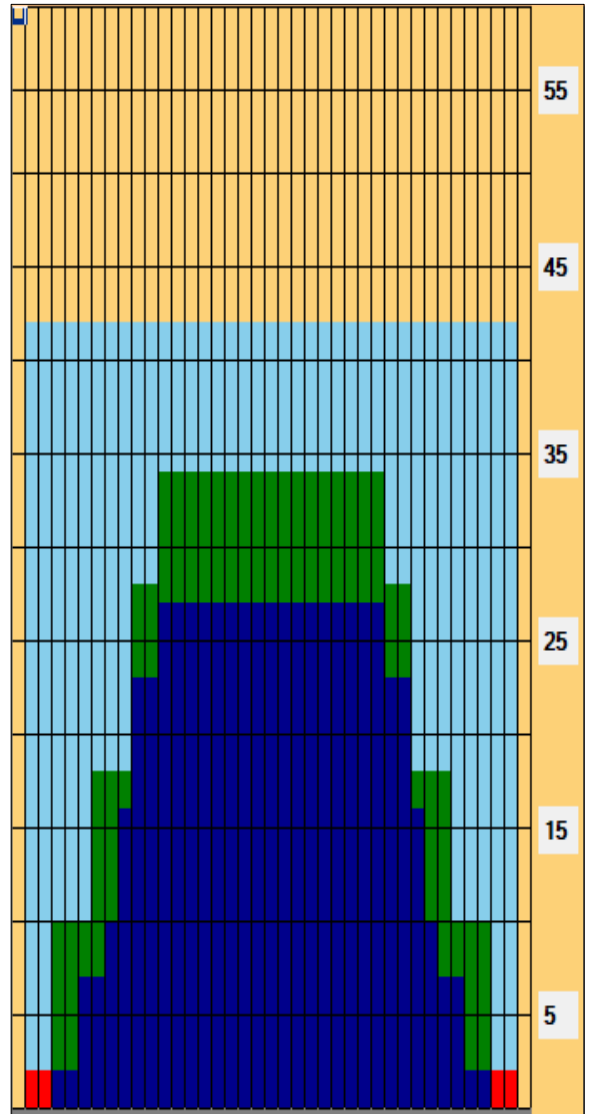

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	4.77	1.33	1	1	1.33	4.77

